



Portable Dry Powder Fire Extinguisher



9kg

6kg

4kg

2kg

1kg

TECHNICAL DATA					
Model No.	UF - 9	UF - 6	UF - 4	UF - 2	UF - 1
Part No.	FEU - 9D	FEU - 6D	FEU - 4D	FEU - 2D	FEU - 1D
Capacity	9.0 kg	6.0 kg	4.0 kg	2.0 kg	1.0 kg
Type of Extinguishant	ABC Dry Powder				
Type	Stored Pressure				
Pressurised Agent	Nitrogen				
Working Pressure	12 bar (174psi)				
Test Pressure	25 bar (362.5psi)				
Temperature Range	-20°C to 60°C				
Discharge Time (approx.)	20s	18s	14s	12s	7s
Overall Height	560 mm	560 mm	470 mm	378 mm	330mm
Cylinder Diameter	181 mm	157 mm	157 mm	110 mm	79 mm
Approx. Full Weight	13.0 kg	9.4 kg	6.9 kg	3.3 kg	1.9 kg
Body Material	Cold Rolled Steel				
Finishing	Red (RAL 3000)				
Class of Fire	A, B, C, E				
Fire Rating	27A 144B	27A 144B	13A 70B	13A 55B	5A 21B
Manufactured & Approved	MS 1539 PART 1 : 2002				
Throw Range Discharge	3-4 m (approx.)				



SIRIM
Certified To:
MS 1539 PART 1: 2002
Certification No: PU 15303

All specifications and information indicated in this catalogue are subjected to change without prior notice.

UNIQUE FIRE INDUSTRY SDN BHD Co. No. 418731-U

No. 9, Jalan Anggerik Mokara 31/55, Kota Kemuning, Seksyen 31, 40460, Shah Alam, Selangor, Malaysia
T: +603 5131 1226 F: +603 5131 3326 (Account) F: +603 5131 3826 (Sales) F: +603 5131 2731 (Sales)
F: +603 5131 1863 (Counter Sales) E: enquiry@uniquefire.com W: www.uniquefire.com

2 kg Portable Dry Powder Fire Extinguisher



SIRIM
Certified To:
MS 1539 PART 1 : 2002
Certification No: PU 15303

TECHNICAL DATA	
Model No.	UF - 2
Part No.	FEU - 2D
Capacity	2.0 kg
Type of Extinguishant	ABC Dry Powder
Type	Stored Pressure
Pressurised Agent	Nitrogen
Working Pressure	12 bar (174psi)
Test Pressure	25 bar (362.5psi)
Temperature Range	-20°C to 60°C
Discharge Time (approx.)	12s
Overall Height	378 mm
Cylinder Diameter	110 mm
Approx. Full Weight	3.3 kg
Body Material	Cold Rolled Steel
Finishing	Red (RAL 3000)
Class of Fire	A, B, C, E
Fire Rating	13A 55B
Manufactured & Approved	MS 1539 PART 1 : 2002
Throw Range Discharge	3-4 m (approx.)

1 kg Portable Dry Powder Fire Extinguisher



SIRIM
Certified To:
MS 1539 PART 1 : 2002
Certification No: PU 15303

TECHNICAL DATA	
Model No.	UF - 1
Part No.	FEU - 1D
Capacity	1.0 kg
Type of Extinguishant	ABC Dry Powder
Type	Stored Pressure
Pressurised Agent	Nitrogen
Working Pressure	12 bar (174psi)
Test Pressure	25 bar (362.5psi)
Temperature Range	-20°C to 60°C
Discharge Time (approx.)	7s
Overall Height	330mm
Cylinder Diameter	79 mm
Approx. Full Weight	1.9 kg
Body Material	Cold Rolled Steel
Finishing	Red (RAL 3000)
Class of Fire	A, B, C, E
Fire Rating	5A 21B
Manufactured & Approved	MS 1539 PART 1 : 2002
Throw Range Discharge	3-4 m (approx.)

All specifications and information indicated in this catalogue are subjected to change without prior notice.

Trolley Type Dry Powder Fire Extinguisher



25kg

TECHNICAL DATA	
Model No.	UFM25
Part No.	FEUT- 25D
Capacity	25kg
Type of Extinguishant	ABC Dry Powder
Type	Stored Pressure
Propellant	Nitrogen
Working Pressure	15 bar (218 psi)
Test Pressure	30 bar (435 psi)
Temperature Range	-20°C to 60°C
Discharge Time	15s (approx.)
Overall Length	440mm
Overall Width	450mm
Overall Height	960mm
Overall Weight	60 kg
Body Material	CR Steel
Finishing	Red (RAL 3000)
Class of Fire	A, B, C, E
Fire Rating	A 233B C
Throw Range Discharge	5 - 6m (approx.)



50kg

TECHNICAL DATA	
Model No.	UFM50
Part No.	FEUT- 50D
Capacity	50kg
Type of Extinguishant	ABC Dry Powder
Type	Stored Pressure
Propellant	Nitrogen
Working Pressure	15 bar (218 psi)
Test Pressure	30 bar (435 psi)
Temperature Range	- 20°C to 60°C
Discharge Time	30s (approx.)
Overall Length	490mm
Overall Width	500mm
Overall Height	1110mm
Overall Weight	92kg
Body Material	CR Steel
Finishing	Red (RAL 3000)
Class of Fire	A, B, C, E
Fire Rating	A 233B C
Throw Range Discharge	5 - 6m (approx.)

All specifications and information indicated in this catalogue are subjected to change without prior notice.

Portable Carbon Dioxide Fire Extinguisher



5kg



SIRIM
Certified To:
MS 1539 PART 1: 2002
Certification No: PU 15303

2kg

TECHNICAL DATA		
Model No.	GL 2.0	GL 5.0
Part No.	FEU-2C	FEU-5C
Capacity	2.0kg	5.0kg
Type of Extinguishant	Carbon Dioxide (CO ₂)	
Working Pressure	60 bar (870 psi)	
Test Pressure	250 bar (3625 psi)	300 bar (4350 psi)
Temperature Range	-20°C to 60°C	
Discharge Time (approx.)	6s	9s
Overall Height	525mm	755mm
Overall Diameter	114mm	137mm
Full Weight (approx.)	7.5kg	17kg
Body Material	Carbon Steel	Alloy Steel
Finishing	Red (RAL 3000)	
Class of Fire	B, E	
Fire Rating	21B	55B
Manufactured & Approved	MS 1539:PART 1:2002	
Throw Range Discharge (approx.)	2-3m	3-4m

Trolley Type Carbon Dioxide Fire Extinguisher



45kg

TECHNICAL DATA	
Part No.	CYL-TRO
Manufacture Standard	GB5099-94
Capacity	45kg
Type of Extinguishant	Carbon Dioxide (CO ₂)
Working Pressure	150 bar (2175psi)
Test Pressure	225 bar (3263 psi)
Temperature Range	-20°C to 60°C
Discharge Time (approx.)	30s (approx.)
Empty Weight	75 kg
Body Material	37 Mn Steel
Finishing	Red (RAL 3000)
Class of Fire	B, E
Throw Range Discharge	3-4m (approx.)
CYLINDER ON TROLLEY	
Overall Height	1530 mm
Overall Width	267 mm

All specifications and information indicated in this catalogue are subjected to change without prior notice.

UNIQUE FIRE INDUSTRY SDN BHD Co. No. 418731-U

No. 9, Jalan Anggerik Mokara 31/55, Kota Kemuning, Seksyen 31, 40460, Shah Alam, Selangor, Malaysia
 T: +603 5131 1226 F: +603 5131 3326 (Account) F: +603 5131 3826 (Sales) F: +603 5131 2731 (Sales)
 F: +603 5131 1863 (Counter Sales) E: enquiry@uniquefire.com W: www.uniquefire.com

Portable Foam Fire Extinguisher



9L

TECHNICAL DATA	
Model No.	UF9F
Part No.	FEU-9F
Capacity	9L
Type of Extinguishant	3% AFFF Foam
Type	Stored Pressure
Propellant	Nitrogen
Working Pressure	14 bar (203 psi)
Test Pressure	27 bar (392 psi)
Temperature Range	5°C to 60°C
Discharge Time	65 - 75s (approx.)
Overall Length	220mm
Overall Width	185mm
Overall Height	585mm
Approx. Full Weight	12.5kg
Body Material	CR Steel
Finishing	Red (RAL 3000)
Class of Fire	A, B
Throw Range Discharge	4 - 5m (approx.)
Fire Rating	21A, 183B

Trolley Type Foam Fire Extinguisher



45L

TECHNICAL DATA	
Model No.	UFM45F
Part No.	FEUT-45F
Capacity	45L
Type of Extinguishant	3% AFFF Foam
Type	Stored Pressure
Propellant	Nitrogen
Working Pressure	15 bar (218 psi)
Test Pressure	30bar (453 psi)
Temperature Range	5°C to 60°C
Discharge Time	65 - 75s (approx.)
Overall Length	490mm
Overall Width	670mm
Overall Height	1110mm
Approx. Full Weight	85kg
Body Material	CR Steel
Finishing	Red (RAL 3000)
Class of Fire	A, B
Throw Range Discharge	6 - 7m (approx.)
Fire Rating	A233B

All specifications and information indicated in this catalogue are subjected to change without prior notice.


Indoor Fire Extinguisher Cabinet



TECHNICAL DATA		
Model	9kg Dry Powder	2kg CO ₂
Part No.	CAB-FEI	CAB-FEI
Dimension (mm)	280(W) x 240(D) x 710 (H)	280(W) x 240(D) x 710 (H)
Installation	Wall Mounted	
Material	Mild Steel	
Thickness	0.9 mm	
Finishing	Epoxy Powder Red	

* Stainless steel material available on request

Outdoor Fire Extinguisher Cabinet

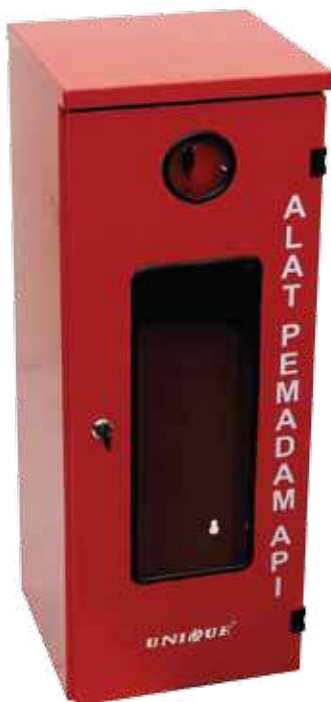

TECHNICAL DATA		
Model	9kg Dry Powder	2kg CO ₂
Part No.	CAB-FEO	CAB-FEO
Dimension (mm)	280(W) x 250(D) x 690(H)	280(W) x 250(D) x 725(H)
Installation	Wall Mounted	
Material	Mild Steel	
Thickness	0.9 mm	
Finishing	Epoxy Powder Red	

* Stainless steel material available on request

All specifications and information indicated in this catalogue are subjected to change without prior notice.